

atto³²⁰
320 x 240 – 12 μ m

Based on continuous feedback from our customers and proactively collecting their needs, Atto320 is the first 12 μ m technology thermal imager developed by Lynred.

Offering high quality moving images and low power consumption, Atto320 combines key values to meet the requirements of Leisure, Surveillance, Thermography and Firefighting applications.

LATEST LYNRED PRODUCT GENERATION



HIGH QUALITY MOVING IMAGES



SEAMLESS INTEGRATION




OPTIMIZED TOTAL COST OF OWNERSHIP

LEISURE



SURVEILLANCE

INDUSTRY




●●LATEST LYNRED PRODUCT GENERATION ! ●●

atto³²⁰

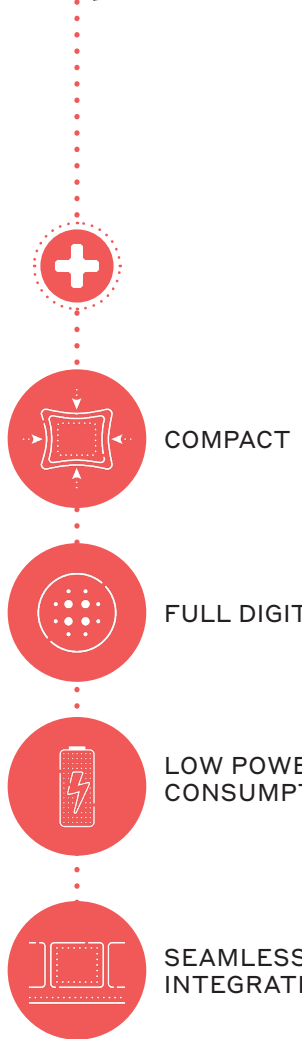


HIGH-QUALITY MOVING IMAGES	
Sharp contrast	■ Thermal sensitivity < 60 mK (f/1, 300K, 60Hz) ■ [-40°C; +85°C] operating temperature range
Fluid and smooth image	■ Frame rate up to 60Hz ■ Thermal time constant 10 ms
High uniformity	■ Array operability > 99.5%
SEAMLESS INTEGRATION	
Simplified electronic design	■ Full digital component
High volume compliant	■ Surface Mount Device (J-Lead44) ■ JEDEC's reflow and handling standards compatible
Flexible configuration	■ Full access to sensor features (FC) ■ Free run or external trigger mode
OPTIMIZED TOTAL COST OF OWNERSHIP	
Reduced optic size and cost	■ 12 μ m pixel pitch
Simplified image processing	■ Predictable behavior ■ TECless, Shutterless compatible
Battery optimization	■ Low power consumption < 220 mW ■ Digital mode

Recognition distances for human measuring 1.80 m x 0.50 m

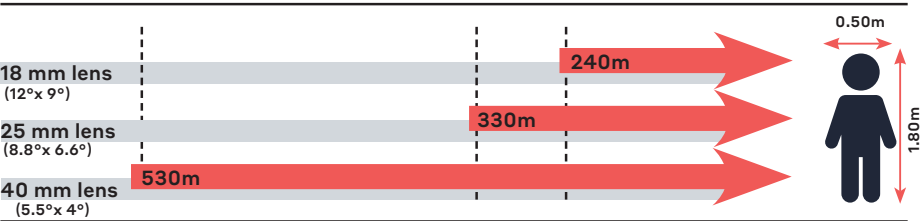

Range for Johnson's criteria, target deltaT = 2K, perfect atmospheric and optics transmissions, theoretical square pixel.



LYNRED HEADQUARTERS
Avenue de la Vauve - CS 20018
91127 Palaiseau - France
Phone +33 (0)1 60 92 18 30
info@lynred.com

DEVELOPMENT AND PRODUCTION CENTER
Actipole - CS 10021 - 364, route de Valence
38113 Veurey-Voroize - France
Phone +33 (0)4 76 28 77 00
info@lynred.com