



THERMAL SENSOR TECHNOLOGIES FOR EMBEDDED SYSTEMS



OVERVIEW OF THE MARKET

SEGMENTS & APPLICATIONS

In today's world, conflicts are being fought in an increasingly high-tech battlefield, which is leading to a paradigm shift. Technology solutions represent a weapon of choice among armed forces for ensuring operational readiness. As such, they are constantly looking to upgrade their equipment with enhanced performance levels capable of meeting a wide range of needs, including protection, mobility, autonomy, stealth, communication and command.

Embedded defense systems consequently play an essential role in enabling troops to achieve the best possible outcome from their missions. They allow vehicles, aircraft, drones, boats and submersibles to **detect**, **recognize** and **identify** enemy threats. In various operational situations, they help forces **anticipate**, **react** and **respond** with the necessary level of information to take the right decisions and drastically minimize the risk of a mistake.


66

*Infrared sensors fulfill these needs. Combined with other sensors, they are **key** to delivering the required performance during missions and protecting against new threats. They need to be **reliable**, **robust** and **compact** to guarantee access to information and meet users' needs on the battlefield.*


88



RELIABILITY



LONGER RANGE



COMPACT



RUGGED DESIGN
FOR HARSH
ENVIRONMENTS



Use cases:

- Active Protection System
- Hostile Fire Detection
- Commander & gunner sights
- Missile Warning System
- Directional Infrared Counter Measures
- Submarine Optronic Masts
- POD, Gimbal
- Search & Track
- Remote Control Weapon Sights
- Driving Vision Enhancement
- Local Situation Awareness



CHALLENGES


The key factors for these missions include:

- **SERVING INCREASINGLY COMPACT CARRIERS WITH HIGH-PERFORMANCE DETECTION SOLUTIONS**
- **DETECTING AND IDENTIFYING TARGETS EVEN EARLIER**
- **DETECTING AND IDENTIFYING EVER SMALLER TARGETS, INCLUDING THE NEW THREAT OF DRONES**

LYNRED:
the partner you can rely on

- **High-performance infrared sensors for more than 30 years** (high sensitivity, high frame rate, etc.). Our products provide a tactical advantage through their unmatched detection, recognition and target identification capabilities, helping to protect lives
- **An extensive range of cooled and uncooled thermal sensors** covering the entire infrared spectrum to support infantry troops during their missions
- **Reliable products** approved for use in harsh environments (MIL-STD-810/833, thermal weapon sights, etc.) and guaranteed long-term availability compatible with military programs
- **A dedicated customer support team** tasked with providing assistance and technical support. We take a proactive approach to responding to your questions and needs. Our engineers have the skills to work efficiently with your people, from R&D to engineering. Our customer support team is fully integrated into our product lineup, personalized, and available to all customers. Our mission is to help boost your technical capabilities to make your infrared solution development processes more efficient while shortening the time to market
- **Independent supplier** located in Europe

LYNRED infrared sensors
bring your thermal systems to life

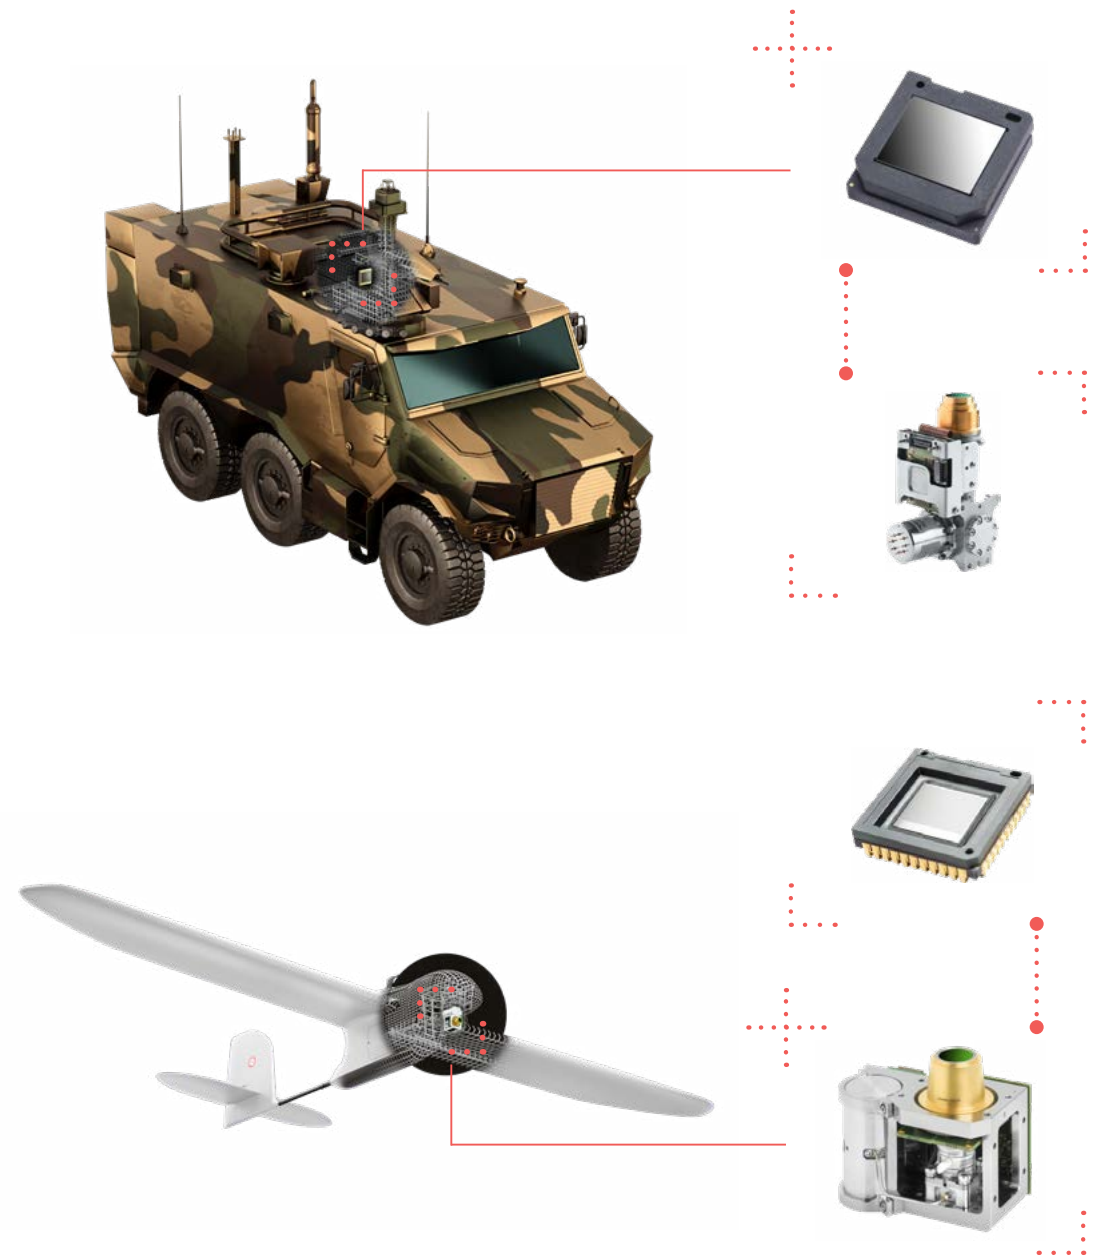


3

million detectors
delivered since 2016

MAIN LYNRED PRODUCT RANGE

Discover all our
defense products



UNCOOLED FOR SHORT TO MEDIUM RANGE 	PRODUCT	FORMAT & PIXEL PITCH	SPECTRAL BAND	TYPICAL NETD*	POWER CONSUMPTION		WEIGHT	SIZE (TYPE PACKAGING)		
					DIGITAL OUTPUT MODE	ANALOG OUTPUT MODE				
	 PICO640S™	VGA, 640 x 480, 17µm	LWIR	25mK (f/1, 300K, 30Hz)	-	< 130mW	< 6.5g	24.4 x 24.4 x 4.7mm³ (Ceramic)		
	 ATTO640D-04	VGA, 640 x 480, 12µm	LWIR	35mK (f/1, 300K, 30Hz)	< 320mW @ 60Hz	< 150mW @ 60Hz < 140mW @ 30Hz	< 3g	17.3 x 17.3 x 4.9mm³ (Wafer-level packaging)		
	 ATTO1024-02™	XGA, 1024 x 768, 12µm	LWIR	< 50mK (f/1, 300K, 30Hz)	-	≤ 470mW @ 50Hz (2 outputs) ≤ 550mW @ 100Hz (4 outputs)	< 10g	29.5 x 29.5 x 5.6mm³ (Ceramic)		
	 ATTO1280-02™	SXGA, 1280 x 1024, 12µm	LWIR	< 50mK (f/1, 300K, 30Hz)	-	≤ 470mW @ 30Hz (2 outputs) ≤ 550mW @ 60Hz (4 outputs)	< 10g	29.5 x 29.5 x 5.6mm³ (Ceramic)		
	 YOCTO1024™	XGA, 1024 x 768, 8.5µm	LWIR	50mK (f/1, 300K, 30Hz)	-	< 260mW	< 4g	18 x 18 x 4.85mm³ (Ceramic)		
COOLED FOR HIGH PERFORMANCE & LONG RANGE 	PRODUCT	FORMAT & PIXEL PITCH	SPECTRAL BAND	TYPICAL NETD*	POWER CONSUMPTION		WEIGHT	SIZE	CDT@20°C	
					REGULATED INPUT POWER	COOLDOWN INPUT POWER				
	 SNAKE SW™ / SNAKE SW Tecless™	VGA, 640 x 512, 15µm	0.9 - 1.7µm	-	-	-	25g < 5g	11cm³ 0.8cm³	-	
	 GALATEA MW SL™	 Available in ATI GALATEA MW SL™	VGA, 640 x 512, 15µm	3.6 - 4.2µm	31mK (300K, 50% WF, 25Hz)	< 3.0Wdc	< 12.0Wdc	360g	56 x 77.5 x 72mm	210sec
	 DAPHNIS HD MW™	HD, 1280 x 720, 10µm	3.7 - 4.8µm or 3.4 - 4.2µm + 4.5 - 4.8µm	20mK (293K, 70% WF, 2.7Me-)	< 4.0Wdc	< 13.0Wdc	670g	NA	270sec	
	 SEEGNUS MW SL™	 Available in ATI ARGO MW SL™	SXGA, 1280 x 1024, 7.5µm	3.6 - 4.2µm	42mK (300K, 50% WF, 25Hz)	< 3.7Wdc	< 15.0Wdc	360g	56 x 77.5 x 72mm	240sec
	 SCORPIO LW™	640 x 512, 15µm	7.7 - 9.3µm at 80K	22mK (f/2, 210 Hz); 10mK (f/2, 30Hz post acc. / 4 frames)	< 6.1Wdc	< 15.0Wdc	550g	NA	360sec	
	 ARGO MW SL™	 Available in ATI ARGO MW SL™	640 x 512, 15µm	3.7 - 4.8µm	<33mK (300K, 50% WF, f/4, 25Hz)	< 3.8Wdc	< 12.0Wdc	360g	56 x 77.5 x 72mm	300sec
	 DRACO MW SL™	 Available in ATI ARGO MW SL™	1280 x 1024, 7.5µm	3.7 - 4.8µm	35mK (300K, 50% WF, f/3, 25Hz)	< 4.7Wdc	< 14.0Wdc	360g	56 x 77.5 x 72mm	<300sec

*Typical value done with standardized LYNRED setup



40^{years}

of experience

80%

exports

1,000

Qualified
workforce

15%

revenue
invested in R&D

***LYNRED, global infrared industry
leader offering a very large
products portfolio.***

- LYNRED, an european leader
in sovereign critical technologies
at the heart of strategic rearmament
- LYNRED, a dependable partner of choice
creating infrared solutions for a safer world

**LYNRED HEADQUARTERS
DEVELOPMENT & PRODUCTION CENTER**

Actipole - CS 10021
364, route de Valence
38113 Veurey-Voroize, France

Phone +33 (0)4 76 28 77 00
info@lynred.com



www.lynred.com

LYNRED USA

373 US Highway 46W
Fairfield, NJ 07004, USA
Phone +1 973.882.0211
info@lynred-usa.com



www.lynred-usa.com

**NIT (NEW IMAGING TECHNOLOGIES)
PREMIUM SWIR BY LYNRED**

1 impasse de la Noisette
91370 Verrières-le-Buisson, France
Phone +33 (0)1 64 47 88 58
info@new-imaging-technologies.com



www.new-imaging-technologies.com